

DAMPERS


Controls



■ Damper



AMS Damper control hardware, RG 10, 20, 30 and 60 are used to regulate the air stream in ductwork. They are easy to fit and provide efficient control of all damper sizes.

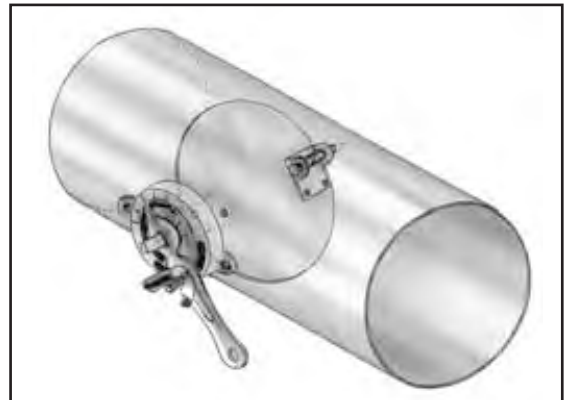

Galvanized steel and zinc die-cast

Inexpensive for quick installation

Multiple possibility of combination using threaded spring bearing and threaded solid bearing

Recommended for use on 0,4 – 0,6mm sheet metal and for dampers of diameter up to 250mm (10")